



Type FFU Q-Slim Line Polymer Cartridge Filter Housing

The filter housings of the type FFU Q20-SL and Q30-SL FFU exist of Polypropylene (PP) and correspond to the FDA regulations. They take up a single filter cartridge with a length of 124 mm or 251 mm. The material is extremely continual compared with acids free of oxidation like hydrochloric acid and sulfuric acid up to 70% of concentration, as well as compared with salt solutions, liquid hydrocarbons, alcohols and concentrated lyes. The housings Q25-SL FFU and Q35-SL FFU have the same case head from Polypropylene, however, the marsh exists of styrene acrylonitrile (SAN). These housings are used to the filtration by water and watered acids at temperatures below 40°C.

TECHNICAL DATA


FFU Q-Slim Line

	Q20-SL	Q25-SL	Q30-SL	Q35-SL
Max. operat. pressure at 50°C (bar)	8,5	8,5	8,5	8,5
Freight weight (kg)	1,0	1,0	1,5	1,5
Material filter head	PP	PP	PP	PP
Material filter sump	PP	SAN	PP	SAN
Material gasket	Nitrile*	Nitrile*	Nitrile*	Nitrile*
Filter cartridge length	124	124	251	251

* also available in other gasket materials

ORDERING INFORMATION

FFU Q-Slim Line

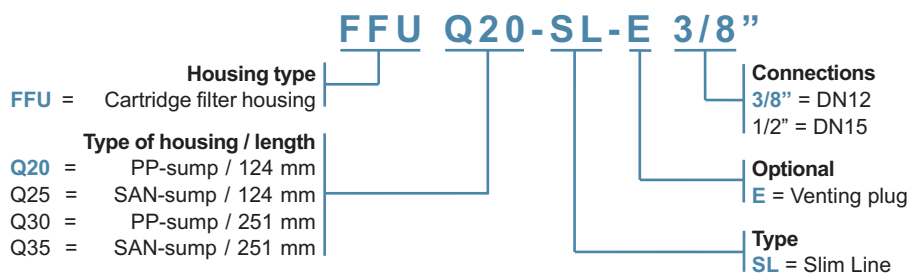

ACCESSORIES

Opening wrench
SW-1



Wall bracket
with screws



DIMENSIONS

Type of filter housing	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
FFU Q20-SL / FFU Q25-SL	166	288	114	112	16	33	40
FFU Q30-SL / FFU Q35-SL							

Subject to technical alterations.
AL1002-00-E

acuraLine®

