



Type 1FUCB SS-Cartridge Filter Housing


The filter housings of 1FUCB series are cartridge filter housings to install a bayonett filter cartridge (Code 7). The housings are designed so that all commonly used filter cartridge lengths can be assembled. The connections (N3/N4) allow the attachment of a differential pressure gauge. Wall mounting bracket and holder for closure clamp are optional.

TECHNICAL DATA

1FUCB

Max. pressure at 80°C	25 bar
Material filter head	AISI 316
Material sump	AISI 316
Material closure clamp	AISI 304
Material gaskets	FPM gaskets*
Material gaskets (N3/N4)	KLINGERSIL® C-4400
Vent / Manometer (N3/N4)	Rp 1/4" with plug
IN / OUT (N1/N2)	Rp 1"
Drain (N5)	Rp 3/8"
Deliverable lengths	10", 20" and 30"

* also available in other gasket materials

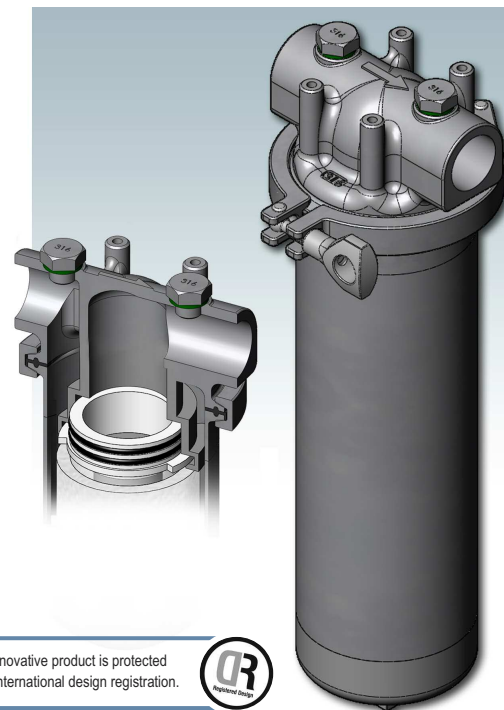

This innovative product is protected with an international design registration.



ORDERING INFORMATION

1FUCB

1FUCB1-25/25-A4F		
Type	1FUCB	Cartridge Filter Housing
Cartridge Length	1 = 226 - 10"	
	2 = 226 - 20"	
	3 = 226 - 30"	
Max. Pressure	25 = 25 bar	
Gaskets	N = NBR	
	F = FPM	
	E = EPDM	
	P = PTFE	
Material	A4 = 1.4401 (AISI 316)	
Connections	25 = Rp 1" (DIN 2999)	

DIMENSIONS

Type	Dimensions (mm)							
	A	B	C	D	E	F	G	H
1FUCB1	427	22	120	ø88,9	62	42	68	146
1FUCB2	674	22	120	ø88,9	62	42	68	146
1FUCB3	915	22	120	ø88,9	62	42	68	146

Subject to technical alterations.
AL1077-01-E

acuraLine®

