

Type 1SFB Sterile Cartridge Filter Housing


The sterile filter housings of the type 1SFB are three-part housings and consist of filter head, filter sump and quick closure. They serve for the admission of filter cartridges with bayonet adaptor Code 7. The filter housings are deliverable for cartridges lengths of 10 ", 20 " or 30". The housings can optionally also hanging be obstructed. To this we offer a fitting wall bracket. The housings per default are delivered with thread feet, these can be equipped with joint feet or pulse damper after arrangement.

TECHNICAL DATA

1SFB

Max. operat. pressure at 80°C (bar)	6
Material housing head	1.4404 - AISI 316L
Material quick closure	1.4404 - AISI 316L
Material housing sump	1.4404 - AISI 316L
Material gaskets	Silicone TC-gasket*
Inlet / outlet (N1/N2)	TC 1" - ISO (DIN 32676)
Vent (N3)	TC 1" - ISO (DIN 32676)
Drain (N4)	TC 1/2" - ISO (DIN 32676)
Deliverable housing lengths	10", 20" und 30"
Cartridge adaptor	Code 7 (226-adaptor)
Surface	electro-polished

* other gasket materials are possible

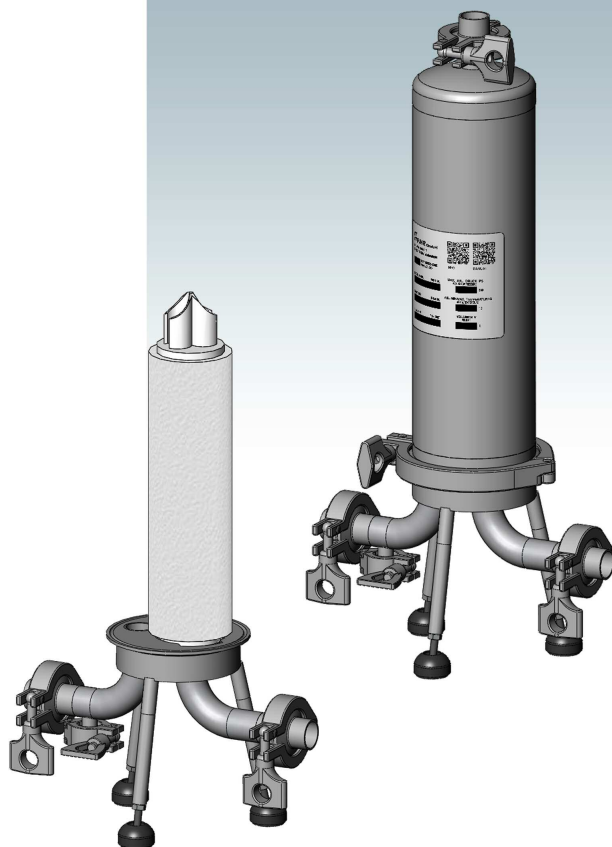

ORDERING INFORMATION F. FILTER HOUSING

1SFB

1SFB10-6/TC25-A4	
Housing type 1SFB = Sterile Cartridge Housing	Material A4 = Stainl. steel 1.4404
Cartridge length 10 = 10" 20 = 20" 30 = 30"	Connection TC25 = ISO 1" (DIN 32676)
	Max. operat. pressure 6 = 6 bar

DIMENSIONS

Housing type	Dimensions (mm)					
	A	B	C	D	E	F
1SFB10	430	~ 80	71	ø101,6	115	101
1SFB20	681					
1SFB30	930					

Subject to technical alterations.
AL1074-00-E

acuraLine®

