www.fuhr-gmbh.com



## *Type* **AC-PP** / **AC-PC** Polymer Cartridge Filter Housing

Head and sump of housing type AC-PP are made of polypropylene (PP). The sumps of the AC-PC housing are made of transparent styrene-acrylonitrile (SAN). They take on a single cartridge filter with a length of 251 mm and 508 mm. The material is extremely resistant to oxidation than the free acids such as hydrochloric and sulfuric acid concentration up to 70%, as well as to salt solutions, liquid hydrocarbons, alcohols and caustic solutions. Housings with SAN-sumps are used for filtration of water and dilute acids at temperatures below 38 °C.


## **TECHNICAL DATA**

AC-PP/AC-PC

AC-PP/AC-PC


	AC-PP1	AC-PC1	AC-PP2	AC-PC2
Max. pressure at 38°C (bar)	5,8	5,8	5,8	5,8
Weight (kg)	0,8	0,8	1,6	1,6
Connections (N1/N2)	Rp 3/4" (DIN 2999 - Internal thread)			
Material head	PP	PP	PP	PP
Material sump	PP	SAN	PP	SAN
Filter cartridge length	251	251	508	508


## **ORDERING INFORMATIONS**

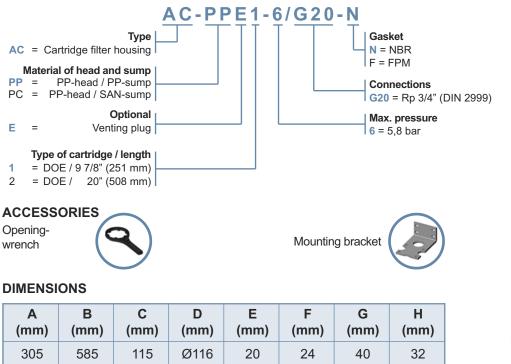


Subject to technical alterations. AL1024-00-E

## i n f o @ f u h r - g m b h . c o m

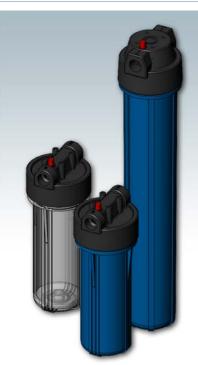



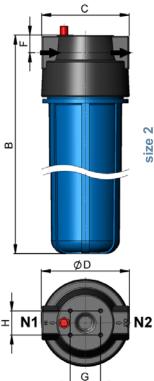

acuraLine®